Type No. 212-022-011

Description / features

The E-Clutch Actuator SSMD is an electro-hydraulic actuator that replaces the conventional, foot pedal driven clutch actuation system ("clutch-by-wire").

The unit is driven by an electric motor and is equipped with an integrated battery pack.

It offers several different modes of operation:

- Manual mode (i.e. control via analog clutch paddle, e.g. mounted on steering wheel)

- Launch control mode (i.e. assisted clutch engagement powered by the integrated control unit) - External position mode (i.e. target master cylinder position being sent from external control unit via CAN)

The E-Clutch features automatic anti-stall function and its state of the art controller allows to also keep the clutch constantly open over time at a very limited current consumption.

The "SSMD" in its name stands for "self-sufficient marshal disconnect", meaning that the unit is featuring the functionality to comply with the FIA safety requirement of being able to externally disconnect the drive train in case of a stranded car with stalled engine & car master switch OFF.

Technical specifcations

Electronic data:

Operating voltage Standby current Peak current Circuit breaker Recommended external circuit breaker Powerbox channel requirements:

Mechanical data:

Dimensions with master cylinder L x W x H Dimensions without master cylinder L x W x H Weight (incl. master cylinder) Master cylinder Max. working travel of actuator

Hydraulic data:

Max. hydraulic clutch pressure Approved fluids

Connector:

Deutch 22 pin Deutch 22 socket, loom side

Temperature range:

Ambient

Hazardous goods classification:

70 bar Glycol-ether-/ silicon-based brake fluids (DOT3, DOT4, DOT5.0, DOT5.1) - No hydraulic oil

> Standard shipping as well as air freighting possible.

The specifications contained in this document are subject to change at any time and at the discretion of MEGA-Line and without prior warning. MEGA-Line accepts no responsibility for any claims or damage arising from the use of this document, or from the use of modules based on this document, including but not limited to claims or damage based on infringement of patents, copyrights or other intellectual property rights. Date: 2022-11-30



MEGA-Line RACING ELECTRONIC GmbH Haunersdorfer Str.3 D - 93342 Saal a.d. Donau Germany

Phone: +49 (0) 9441 6866 - 0 Fax: +49 (0) 9441 6866 - 11 Mail: Web: info@mega-line.com www.mega-line.com























9.0..18.0V

max. 30A

not integrated

35A for 100 ms

approx. 1100 g

19.0 mm

ETA, 452 K34 FN2 50A

approx. 255 x 60 x 98 mm

approx. 144 x 60 x 98 mm

modified AP Racing "CP4400" cylinder

< 0.5 A

Type No. 212-022-011

Ordering information:

The E-Clutch Actuator SSMD version 212-021-011 can be equipped with a master cylinder from AP Racing's CP4400 product line in order to be able to adapt the actuator to your specific clutch setup in an easy and efficient way (Attention: AP standard cylinder has to be modified for usage!)

Order-/part no.'s:

Master cylinder diameter	Order no.	Article no.	
0.7" / 17.8mm (blue)	15578	212-022-011	

All further available master cylinder diameters on request.



MEGA-Line RACING ELECTRONIC GmbH Haunersdorfer Str.3 D - 93342 Saal a.d. Donau

Germany

Phone: +49 (0) 9441 6866 - 0 Fax: +49 (0) 9441 6866 - 11

Mail: info@mega-line.com Web: www.mega-line.com

The specifications contained in this document are subject to change at any time and at the discretion of MEGA-Line and without prior warning. MEGA-Line accepts no responsibility for any claims or damage arising from the use of this document, or from the use of modules based on this document, including but not limited to claims or damage based on infringement of patents, copyrights or other intellectual property rights.

Type No. 212-022-011

Pin assignment

Pin	Function	Dia [AWG]	Туре
1	+ 13.5V supply	22	pwr
2	GND supply	22	pwr
3	GND supply	22	pwr
4	SSMD Battery PWR+ loop IN (short connection direct to pin 5)	22	pwr
5	SSMD Battery PWR+ loop OUT (short connection direct to pin 5)	22	pwr
6	AUX supply OUT	22	pwr
7	Clutch paddle #1 (05V)	24	analog in
8	Clutch paddle #2 (05V)	24	analog in
9	Clutch Sensor external analog (05V)	24	analog in
10	CAN low	24	data
11	AGND	24	pwr
12	Flash	26	digital in
13	AUX Supply Command In (switch to GND)	24	digital in
14	+ 13.5V supply	22	pwr
15	GND supply	22	pwr
16	SSMD Battery PWR+ loop IN (short connection direct to pin 17)	22	pwr
17	SSMD Battery PWR+ loop OUT (short connection direct to pin 17)	22	pwr
18	Marshalling Command OFF - in (switch to GND)	26	digital in
19	CAN high	24	data
20	+5V external sensor supply (max. 50 mA)	24	pwr
21	+13.5V	22	pwr
22	Marshalling Command ON - in (switch to GND)	26	digital in



MEGA-Line RACING ELECTRONIC GmbH Haunersdorfer Str.3 D - 93342 Saal a.d. Donau

Germany

Phone: +49 (0) 9441 6866 - 0 Fax: +49 (0) 9441 6866 - 11

Mail: info@mega-line.com Web: www.mega-line.com

CAN communication:

Baud rate:

Termination resistor:

1 MBaud (varying Baud rates on request) not integrated


Type No. 212-022-011


Drawings





MEGA-Line RACING ELECTRONIC GmbH Haunersdorfer Str.3 D - 93342 Saal a.d. Donau Germany

Phone: +49 (0) 9441 6866 - 0 Fax: +49 (0) 9441 6866 - 11 Mail: info@mega-line.com Web: www.mega-line.com

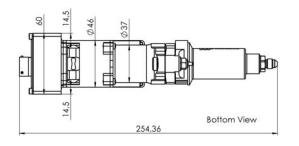



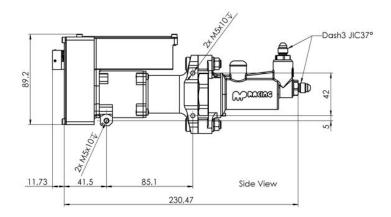





The specifications contained in this document are subject to change at any time and at the discretion of MEGA-Line and without prior warning. MEGA-Line accepts no responsibility for any claims or damage arising from the use of this document, or from the use of modules based on this document, including but not limited to claims or damage based on infringement of patents, copyrights or other intellectual property rights.

Type No. 212-022-011

Operation diagram

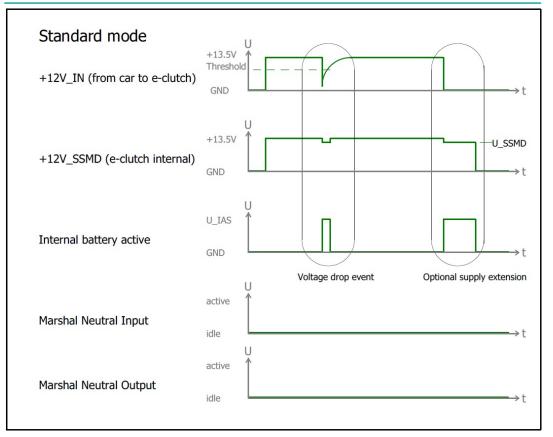

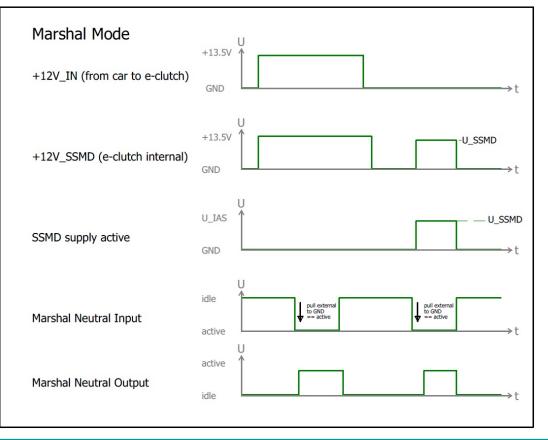

REGINIC ELECTRONIC

MEGA-Line RACING ELECTRONIC GmbH Haunersdorfer Str.3 D - 93342 Saal a.d. Donau

Germany

Phone: +49 (0) 9441 6866 - 0 Fax: +49 (0) 9441 6866 - 11

Mail: info@mega-line.com Web: www.mega-line.com

The specifications contained in this document are subject to change at any time and at the discretion of MEGA-Line and without prior warning. MEGA-Line accepts no responsibility for any claims or damage arising from the use of this document, or from the use of modules based on this document, including but not limited to claims or damage based on infringement of patents, copyrights or other intellectual property rights.